

VA500 Altimeter

The Valeport Altimeter delivers a new approach to the problem of underwater positioning. State of the art signal processing offers unrivalled range and performance from a 500kHz transducer. Millimetric precision, 0.1m – 100m range, RS232/RS485/0-5V & 0-10V analogue outputs with a wide range power supply address the needs of the ROV, AUV, Underwater construction and Hydrographic community package.

The option of integrating a high accuracy pressure sensor (0.01%) as used in the miniIPS offers an unbeatable package for your underwater positioning requirements.

OEM options are also available – please contact Valeport for details.

DATA SHEET

Product Details



BATHYMETRY



METROLOGY & POSITIONING



VALEPORT TERMINAL SOFTWARE

TAE KWANG ELECTRONICS CORPORATION
5TH FLR., K-BLDG., 3, SANGAM-RO 41GIL,
GANGDONG-GU, SEOUL 05307, KOREA

PHONE : 02 479 2703
FAX : 02 479 2705
e-mail : taekwang@tkec.co.kr
Website: www.tkec.co.kr



Sensors

Acoustic

State of the art signal processing technology provides stable, repeatable readings while allowing the range to be extended to unrivalled distances for a 500kHz altimeter.

Type 500kHz broadband transducer

Range 0.1m – 100m

Resolution 1mm

Beam Angle $\pm 3^\circ$

Pressure

The optional pressure sensor fitted to the Altimeter is a temperature compensated piezo-resistive sensor, which delivers the performance previously only available from a resonant quartz sensor at a more cost-effective price.

Type Temperature compensated piezo-resistive

Range 10,20,30,50,100,200,300,400 and 600 Bar

Accuracy $\pm 0.01\%$ FS

Resolution 0.001% FS

Data Acquisition

Sampling Continuous or data on demand (by command/TTL)

Data Rate 1, 2, 4Hz and continuous

Communications

Digital Output RS232 & RS485 fitted as standard

Protocol 4800 to 115200 baud, (8,1,N)

Format User defined output formatting

Analogue output 0-5/10V fitted as standard

Software

Supplied with DataLog X2 software for instrument setup and data display. DataLog X2 is licence free

Power Requirements

Input 9 – 28V DC

Power <125 mA @ 12V


Physical

Housing Titanium (6000m rated)

Weight standard unit: <1kg in air
with pressure: <1.5kg in air

Connector SubConn MCBH10F Titanium

Shipping 36 x 29 x 16cm <3Kg

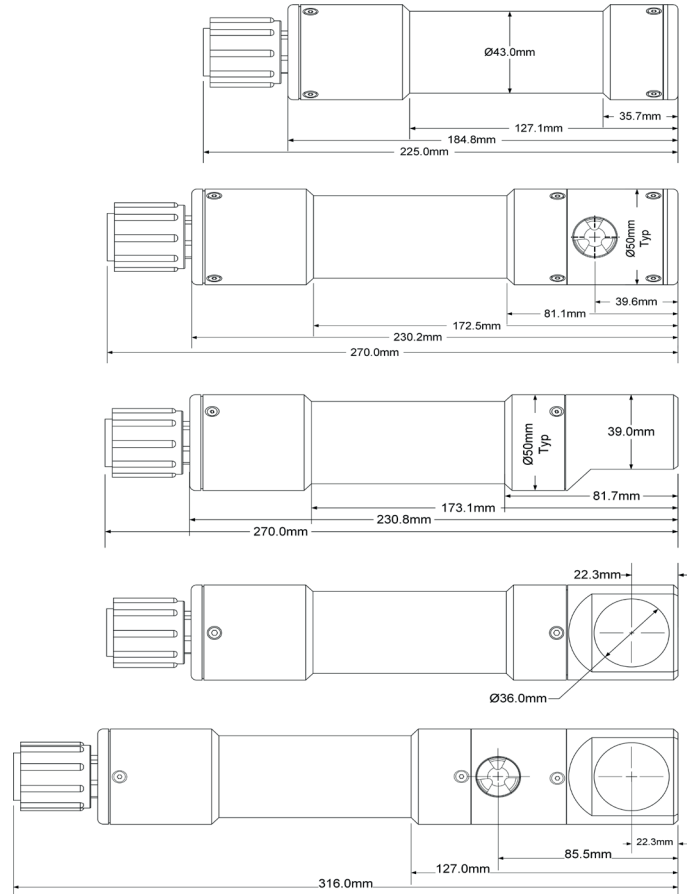

Ordering

0430003 VA500 Altimeter, in Titanium

0430004 VA500P Altimeter with 0.01% FS pressure sensor, in Titanium

0430005 VA500RA Altimeter Right Angled sensor in Titanium

0430006 VA500RAP Altimeter Right Angled sensor, in Titanium with 0.01% FS pressure sensor

All supplied with 50cm pigtail, operation manual and transit case

Datasheet Reference: VA500 Altimeter | March 2021

As part of our policy of continuing development, Valeport Ltd. reserve the right to alter at any time, without notice, all prices, specifications, designs and conditions of sale of all equipment - Valeport Ltd © 2021

