

IMAGENEX SPORTSCAN

APPLICATIONS:

- Underwater Archaeology
- Sunken Timber Recovery
- Search & Recovery
- Surveying
- Law Enforcement Work
- Scientific Research
- Environmental Survey

The Imagenex SportScan is an affordable dual channel, high-resolution, digital side-scan sonar geared toward the sport diving market. Operate the SportScan directly from your laptop or desktop PC. All that is needed is a 12 VDC power source. Connect a GPS receiver for latitude and longitude coordinates.

FEATURES:

- Very user friendly
- Lightweight and extremely portable
- Inexpensive
- 23 m (75') tow cable included
- High resolution
- Up to 240 m (800') total coverage
- · GPS interface
- Speed correction
- · Height and length measurements
- 4 user selectable colour tables
- XTF Conversion program (optional)



| HARDWARE | | |
|-----------------------|---|--|
| SPECIFICATIONS: | | |
| FREQUENCY | 330 kHz or 330 / 800 kHz | |
| TRANSDUCER | One transducer per side, tilted down 20° | |
| TRANSDUCER BEAM WIDTH | 330 kHz: 1.8° x 60° | |
| | 800 kHz: 0.7° x 30° | |
| RANGE RESOLUTION | Both sides displayed: Range scale ÷ 250 | |
| | Single side displayed: Range scale ÷ 500 | |
| MAX. OPERATING DEPTH | 30 m (100') | |
| MAX. CABLE LENGTH | 60 m (200') | |
| INTERFACE | RS-232 serial interface @ 115.2 kbps | |
| CONNECTOR | Wet mateable (Impulse LPMBH-4-MP) | |
| POWER SUPPLY | 10 – 16 VDC at 300 mA max. | |
| DIMENSIONS | 114 mm (4.5") diameter x 833 mm (32.8") length | |
| WEIGHT: In Air | 4.5 kg (10 lbs) | |
| | not including ballast | |
| In Water | 1.2 kg (2.7 lbs) | |
| BALLAST | Standard diver belt weights (readily available at dive shops) | |
| MATERIALS | Polyurethane & 6061-T6 Aluminum | |
| FINISH | Clear anodized | |


TAE KWANG ELECTRONICS CORPORATION5TH FLR., K-BLDG., 3, SANGAM-RO 41-GIL,
GANGDONG-GU, SEOUL 05307, KOREA

T PHONE: 02 479 2703 ~ 4

e-mail: taekwang@tkec.co.kr

w http://www.tkec.co.kr

| SOFTWARE | Win881ss.exe | | |
|---|--|--|--|
| SPECIFICATIONS: | | | |
| WINDOWS™ OPERATING SYSTEM | Windows™ XP, Vista, 7, 8, 10 | | |
| MODES | Side Scan | | |
| RANGE SCALES | 15 m, 30 m, 60 m, 90 m, and 120 m (50', 100', 200', 300', and 400') | | |
| FILE FORMAT | (filename).81s | | |
| GPS INPUT (4800, N, 8, 1) NMEA 0183 FORMATS: | GLL, GGA, VTG, RMC | | |
| RECOMMENDED MINIMUM COMPUTER REQUIREMENTS: | 100 MHz Pentium 16 MB RAM 1 GB Hard Disk 800 x 600 x 256 colour graphics | | |

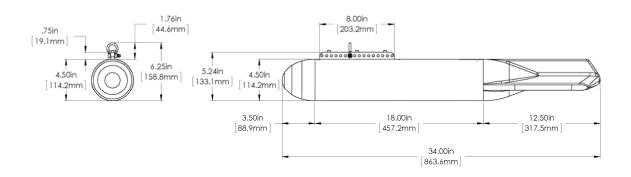

| ORDERING | | | | |
|--|----------|-------------|--|--|
| INFORMATION: | | | | |
| 30 m unit w / 23 m SportScan tow cable | Standard | 881-000-150 | | |
| 330 / 800 kHz | Option | -005 | | |
| 60 m (200') SportScan tow cable | Option | -017 | | |
| XTF Converter | Option | -019 | | |
| (Imagenex .81s to XTF) | | | | |

T PHONE: 02 479 2703 ~ 4

w http://www.tkec.co.kr

(E) e-mail : taekwang@tkec.co.kr